



SPECIFICATIONS

MODEL NUMBER	DOWED	PODE	CTROVE	DOD	RAM S		CAPACITY				
MODEL NUMBER	POWER	BUKE	STROKE	KUD	PRESS	RETURN	(TONS)	(LBS.)	L x	W >	(H
HFP-100 MWH	10 HP 3 Phase	9"	16"	4.0"	19 IPM	24 IPM	100	3,200	50"	82"	108"

Standard voltages available - please specify when ordering. 10 HP 230 1 phase available.


H FRAME PRESS 100 Ton Powered Movable Workhead

STANDARD FEATURES

- √ Electric / Hydraulic operation provides smooth, consistent pressing action.
- $\sqrt{\text{Open sides}}$ to facilitate work on long pieces.
- √ Flat ram nose can be easily changed to allow the user to adapt the press to a specific job.
- $\sqrt{\text{Quality Baldor motor, low speed.}}$
- $\sqrt{\text{Low speed pump quiet, dependable operation.}}$
- √ **Self-locking** table design eliminates lateral movement.
- √ Powered movable workhead for off-center work allows operator to position the cylinder from left to right with the touch of a lever.
- √ Hydraulic power-lift for vertical displacement of table.
- Pressure regulator to limit the ram pressure.
- √ Cylinder activation is fingertip controlled, the more the hand lever is engaged the more the ram movement is accelerated. This allows the operator to control the proper speed for the task.
- √ **High capacity** 15 GAL. hydraulic oil reservoir.
- √ Low pressure hydraulic system maintains lower oil temperatures, resulting in higher efficiency and safer operation.
- √ All hydraulic and mechanical parts are standard in the industry, and available throughout North America.

DIMENSIONS (INCHES)

MODEL	A	В	C	D	E	F
HFP-100 MWH	85	48	64	38	12.5	32

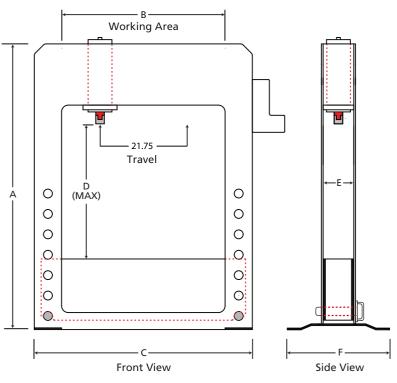

AVAILABLE OPTIONS

VB-100 V BLOCKS matched pair.

FSG-100 Front safety guard for operator protection.

FPS-100 Foot pedal-electric solenoid valve for hands-free operation, c/w electric control panel.

9-24 24 Inch stroke cylinder.

10-230-1 10 HP 230 VOLTS 1 PHASE 41 AMPS.

SSE-100 Stop / Start c/w emergency stop button, wired direct to motor.

Custom designs available We Build Them your Way!